
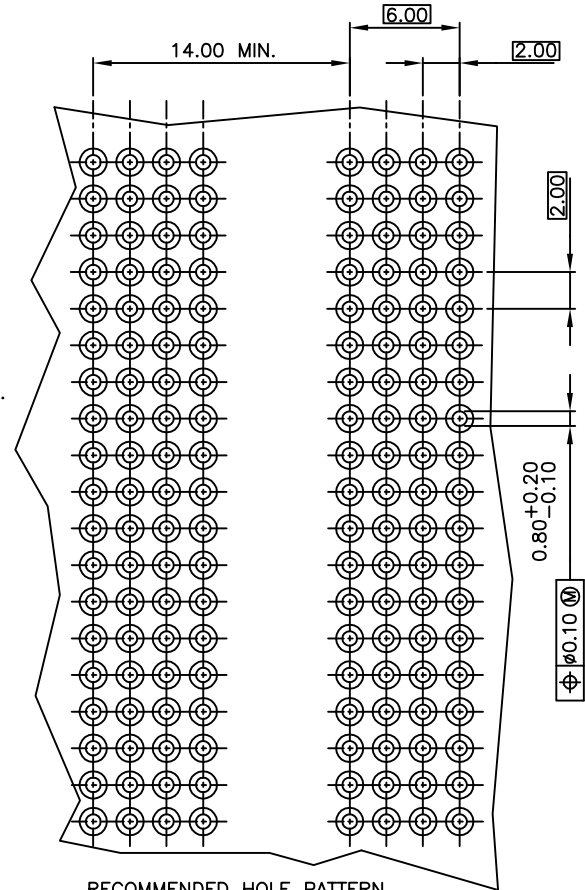
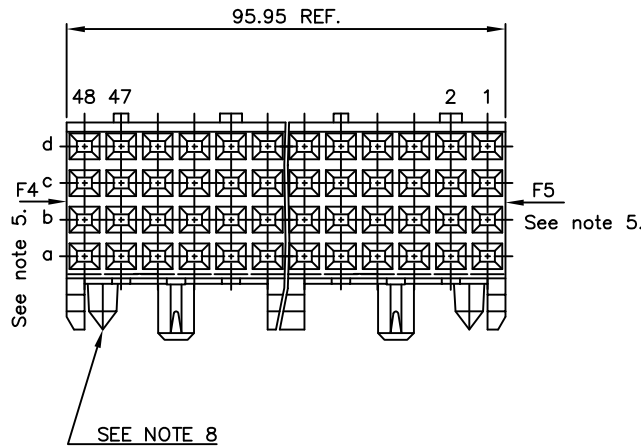



PLATING CONTACT AREA:

DASH NR:	PERFORMANCE LEVEL
-1YY/1YYLF	TELCORDIA CO
-2YY/2YYLF	CUSTOMER SPECIAL
-3YY/3YYLF	CUSTOMER SPECIAL

PRODUCT NR.	DIM "A"
88957-X01	5.00 REF.
88957-X11	3.35 REF.
88957-X01LF	5.00 REF.
88957-X11LF	3.35 REF.

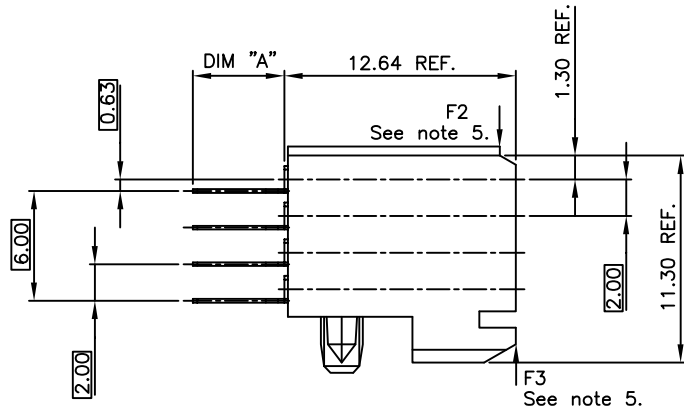

RECOMMENDED HOLE PATTERN, COMPONENT SIDE.

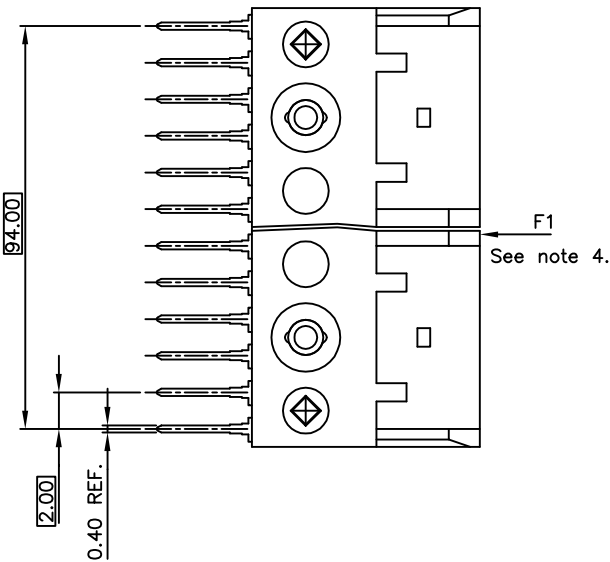

NOTES:

1. BODY MAT'L: LIQUID CRYSTAL POLYMER 30% GLASS FLAME RETARDANT ACC. UL 94-V0
2. TERMINAL MATERIAL: PHOSPHOR BRONZE.
3. PLATING SOLDER TAILS 2-8 μm SnPb 90-97 OR PURE Sn FOR LF.
4. LOAD IN THIS DIRECTION ( E.G. THROUGH CODING) 30 NEWTON PER 12 MM CONNECTOR LENGTH.
5. LOAD IN THIS DIRECTION 100 NEWTON MAXIMUM PER CONNECTOR.
6. TO ENSURE PROPER ALIGNMENT OF MULTIPLE MODULES ON A BOARD, THE USE OF A FIXTURE IS RECOMMENDED.
7. PRODUCT MARKING: PARTNUMBER & BATCH I.D.
8. DIAMOND LOCATION PEG ARE ONLY EXISTED ON THE BOTH SIDES OF PRODUCT.
9. THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008.
10. THE HOUSING WILL WITHSTAND EXPOSURE TO 260 DEGREE PEAK TEMPERATURE FOR 10 SECONDS IN A WAVE SOLDER APPLICATION.

mat'l. code		tolerances unless otherwise specified		CUSTOMER COPY			
ltr	ecn no	dr	date	linear	projection		
H	D007-0170	Cent	05/22/07			title STR FEMALE STB SIGNAL 96MM	
J	D008-0171	TER	8/28/08			product family METRAL (tm) code 213	
K	D009-0088	Cent	06/06/08	angles		size dwg no 88957 sheet 1 of 1	
-		dr	A van Zanten	910809	mm	scale 5:1	
E	H40355	DOB	940527	engr	H.Bouwknegt	931122	
F	V91450	DOB	990827	chr	P.Schalk	910809	
G	D005-048	CLU	051115	app	van Woensel	911227	
sheet	revision	K					
index	sheet	1					

All rights reserved. Reproduction or issue in kind, in any form, is prohibited without written authority from the copyright owner. FCG Electronics.